

# 300 PSI Booster Hose

## SBR-EPDM Rubber Covered

The Kocheck 300 PSI Rubber Booster Hose line is made from the highest quality materials. All configurations are assembled to order at our plant in Putnam, CT USA. Available with two different styles of reliable, long-lasting aluminum alloy couplings, well known for their superior performance and durability.

### Main Features

- 300 PSI working pressure rating is suitable for most fire pump applications.\*\*
- Tough rubber construction and braided polyester cord reinforcement offers good kink and crush resistance for trouble-free service.
- Well-suited for use on hose reels in forestry and other first-response applications.
- Smooth rubber cover features SBR-EPDM blend, offering excellent abrasion protection and resistance to heat, cuts, ozone, and mild chemicals.
- EPDM rubber liner is durable and free-flowing.
- Service temperature range: -20F to 180F
- Minimum bend radius: 4.1"
- Available in 1" diameter, and continuous lengths up to 400 feet.

### Connections


- Standard indented pin lug (hole type) bowl couplings available with 1" NH and NPSH threads. Rocker lug style bowl couplings available upon request.
- Field repairable indented pin lug couplings are available optionally, with a reusable and easy to assemble two-part collar. No special tools required.
- Special threads available upon request.
- Other types of specialty couplings available upon request.

### Colors & Finishes

- Hose is available in Red.
- Standard aluminum alloy couplings are finished in natural hardcoat, offering superb corrosion and abrasion resistance.
- Powder coated couplings for color-coding are available upon request.
- Chrome-plated couplings are also available upon request.

### Warranty

- 2 Year Manufacturers Warranty

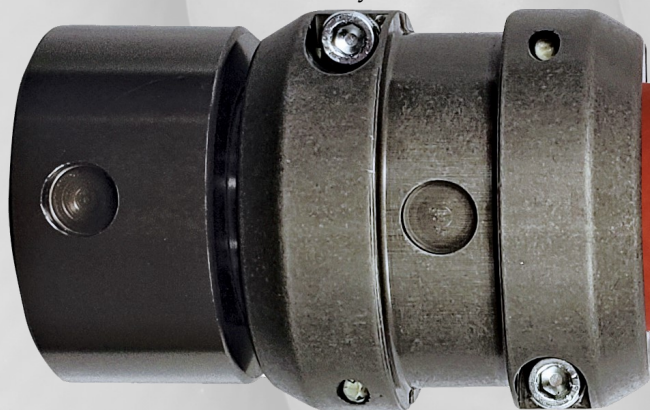

Optional Field Repairable Coupling

\*\* For high-pressure fire pumps supplying greater than 300 PSI WP, consider our 800 PSI-rated Heavy-Duty Rubber Booster Hose instead.

# 300 PSI Booster Hose SBR-EPDM Rubber Covered

## MOST POPULAR SIZES & CONFIGURATIONS

Part Number	Nominal Hose Diameter (IN)	Hose Length (FT)	Working Pressure (PSI)	Minimum Burst Pressure (PSI)	Color	Couplings - Diameter and Type
KR300BH10-50-3	1"	50'	300	900	RED	1" NH SWIVEL FEMALE x MALE
KR300BH10-100-3	1"	100'	300	900	RED	1" NH SWIVEL FEMALE x MALE
KR300BH10-200-3	1"	200'	300	900	RED	1" NH SWIVEL FEMALE x MALE
KR300BH10FR-50-3	1"	50'	300	900	RED	1" NH SWIVEL FEMALE x MALE (Field Repairable)
KR300BH10FR-100-3	1"	100'	300	900	RED	1" NH SWIVEL FEMALE x MALE (Field Repairable)
KR300BH10FR-200-3	1"	200'	300	900	RED	1" NH SWIVEL FEMALE x MALE (Field Repairable)



### Customizations

- Laser engraving is available.
- Other non-standard coupling types, colors, and special threads are available upon request.
- Custom lengths available, please call for part numbers.

### Standard Bowl Coupling