

Nozzles

Constant & Dual Gallonage



NZ009
1" NPSH
10 to 24 GPM



NZ015
1" NPSH
20 to 60 GPM



NZ012
1.5" NPSH
20 to 60 GPM

Red Anodized Coating is standard

- Constructed of light weight Aluminum & Stainless Steel
- Heavy duty bumper for added protection
- Ideal for Fire Fighting and Industrial Applications
- Adjustable from fog to straight stream

- DUAL GALLONAGE** } 10 to 24 GPM - Specify Thread and Size
20 to 60 GPM - Specify Thread and Size
20 to 100 GPM - Specify Thread and Size
- CONSTANT GALLONAGE** } 35 GPM - Specify Thread and Size
100 GPM - Specify Thread and Size



Forestry



NZ008
1" NPSH
10 to 25 GPM

Without bumper

Straight Ridge
Knurled Pattern

Simple quick twist adjusts
the flow pattern



Additional protection
with bumper

NZ011
1.5" NH
20 to 60 GPM

- Constructed of light weight Aluminum & Stainless Steel
- Optional heavy duty bumper for added protection
- Meets or exceeds USDA FS 5100 Series Specifications
- Red Anodizing is standard

Bail Shutoffs

The Ergonomic Pistol Grip of Bail Shut off attaches to our nozzles providing a tailored system.



BV11 Bail Shut Off 1" NH Full Time Swivel x 1" NH M
BV115 Bail Shut Off 1" NH Full Time Swivel x 1 1/2" NH M
BV1515 Bail Shut Off 1 1/2" NH Full Time Swivel x 1 1/2" NH M



PG11 / PG115

PG11 Pistol Grip with Shut Off
1" NH Full Time Swivel x 1 NH M


PG115 Pistol Grip with Shut Off
1" NH Full Time Swivel x 1 1/2" NH M

PG1515 Pistol Grip with Shut Off
1 1/2" NH Full Time Swivel x 1 1/2" NH M

PG1515



Specialty Nozzles

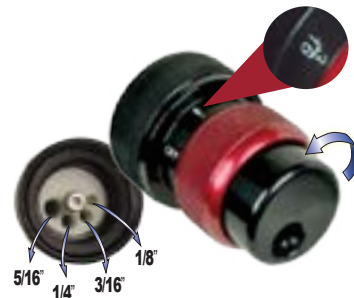

NZ024
4 Spray diameters:
5/16", 1/4", 3/16", 1/8"
offers you different volumes.
Just rotate the tip
to the desired setting.



NZ027 Adjustable Fan Stream Nozzle
Bail Handle creates either a
Wide Band or Smooth Bore
reaching distances up to 80 ft.