

STORZ Building Connections

KOCHEK Storz Building Connections are used as an auxiliary inlet to help supplement a fire protection system's water supply. Coupling reduces the typical connect time for emergency responders versus traditional threaded appliances. The lugged Storz head and cap make installation easy with standard wrenches in the market. The Nitrile gasket seals the Storz head and cap. This seal prevents moisture and foreign matter from entering the connection. Our Stainless Steel locking lever keeps the cap engaged and is a means for the installer to know when seal is complete. Standard models ship with a Gasket Faced Storz and a sealing cap.


KOCHEK offers various finishes to choose from in addition to the standard powder coat options. Special thread requests are satisfied in house domestically with a fully automated machining process.

Storz X Rigid F Thread 30° Elbow W/ Cap

4" & 5" 30 Degree Storz FDC



Std. Model	Pattern	"A" Dimension	Rated Pressure(psig)
SFDC44N	30 Degree	7 7/8"	250 PSI
SFDC54N	30 Degree	8 3/4"	250 PSI
SFDC56N	30 Degree	10 5/8"	250 PSI

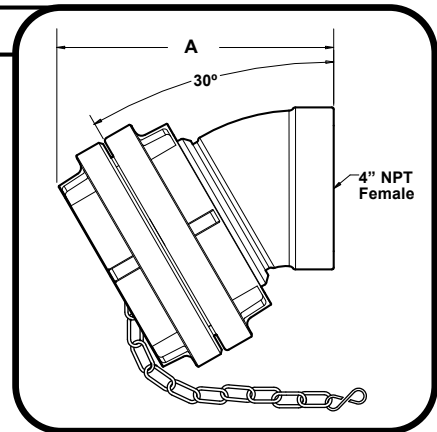


Storz X Rigid F Thread W/ Cap

4" & 5" Straight Storz FDC



Std. Model	Pattern	"A" Dimension	Rated Pressure(psig)
SFDC44N	Straightway	4 1/8"	250 PSI
SFDC54N	Straightway	4 3/8"	250 PSI
SFDC56N	Straightway	5 7/8"	250 PSI

MF Model	Pattern	Size	Rated Pressure(psig)
SFDC44N-MF	Straightway	4 Metal Face x 4 NPT F	250 PSI
SFDC54N-MF	Straightway	5 Metal Face x 4 NPT F	250 PSI
SZM4040-MF	Straightway	4 Metal Face x 4 BSP F	250 PSI
SZM5050-MF	Straightway	5 Metal Face x 5 BSP F	250 PSI

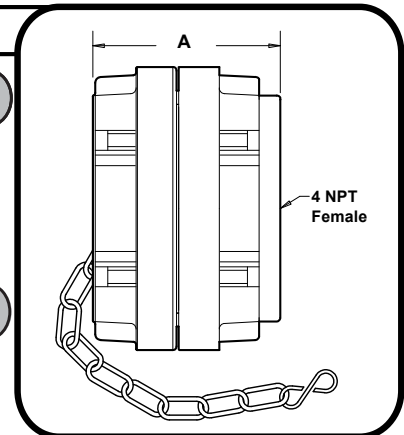

SPECIFICATIONS

- MATERIALS:** 6061-T6 Aluminum Forgings & Extrusions, A356-T6 Aluminum Elbow Castings, Nitrile Gaskets
FINISHES: **STANDARD:** Powder coat (9 standard colors)
OTHER CHOICES: Hardcoat Anodize, Chrome and Brass Plating
OPTIONS: Optional Metal Face Storz (MF) with Vented Cap, Optional Screens